



Alulux CD150

Double walled roll formed aluminum profile with CFC free polyurethane foam core. Ultra hard foam available. Multiple stove enamel coating on polyester resin with structural finish.



Specifications:

Nominal Thickness	8.7 mm
Surface area (exposed height)	40 mm
Weight per square meter	4.8 kg
Maximum size	3.5 x 2.2 m
Slats per meter	25

Slats are **vented**: light control or **unvented**: spring use.



Box size is determined by Guiderail height

137 mm	0 - 80 cm
165 mm	81 - 148 cm
180 mm	149 - 185 cm
205 mm	186 - 265 cm

Curtain Colors: white, brown, alumetalic, grey, beige, cream, woodgrain

Box/Guiderail Colors: white, brown, alumetalic, beige

Extruded Aluminum Guiderails: Canadian & German

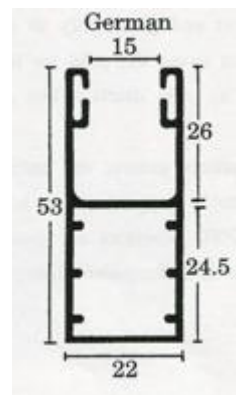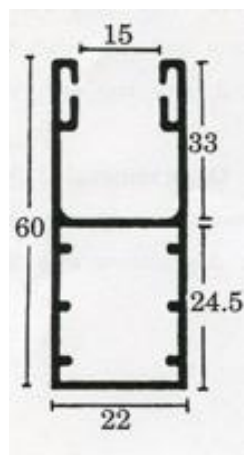

Warm in Winter

Cool in Summer

Security all Year Long