



Alulux CD 200 Ultra

Double walled roll formed aluminum profile with CFC free polyurethane *Ultra hard* foam core. Multiple stove enamel coating on polyester resin with structural finish.



Specifications:

Nominal Thickness	14 mm
Surface area (exposed height)	55 mm
Weight per square meter	7.7 kg
Maximum size	12.0 m ²
Slats per meter	18

Box size is determined by Guiderail height


165 mm	0 - 90 cm
180 mm	91 - 120 cm
205 mm	121 - 160 cm
250 mm	161 - 300 cm
300 mm	301 + cm

Curtain Colors: alumetalic


Box/Guiderail Colors: white, brown, alumetalic, beige

Extruded Aluminum Guiderails


UPH 140

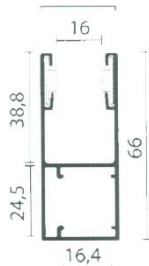


UPH 240

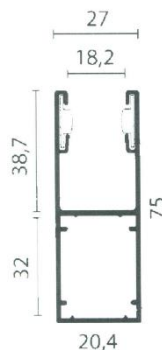

UPH 260

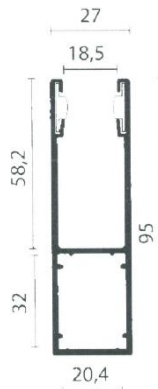

UPH 250/RD

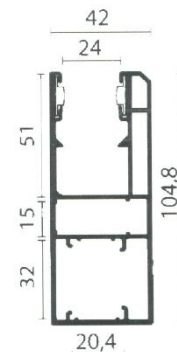

Warm in Winter

Cool in Summer

Security all Year Long