



## Alulux CD 200

Double walled roll formed aluminum profile with CFC free polyurethane foam core. Multiple stove enamel coating on polyester resin with structural finish.



### Specifications:

Nominal Thickness	14 mm
Surface area (exposed height)	55 mm
Weight per square meter	5.5 kg
Maximum size	12.0 m <sup>2</sup>
Slats per meter	18

Slats are **vented**: light control or **unvented**: spring use.

**Box size** is determined by **Guiderail height**


165 mm	0 - 90 cm
180 mm	91 - 120 cm
205 mm	121 - 160 cm
250 mm	161 - 300 cm
300 mm	301 + cm

Curtain Colors: white, brown, alumetalic, beige, cream, and grey


Box/Guiderail Colors: white, brown, alumetalic, beige

### Extruded Aluminum Guiderails


UPH 140

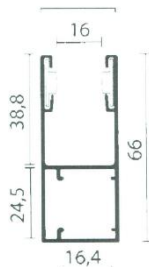


UPH 240

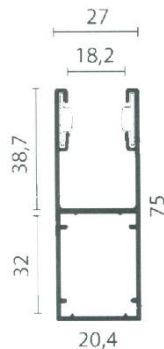

UPH 260

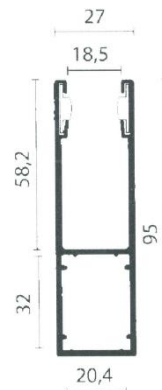

UPH 250/RD

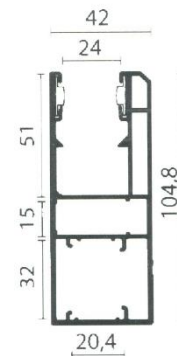

Warm in Winter

Cool in Summer

Security all Year Long