

























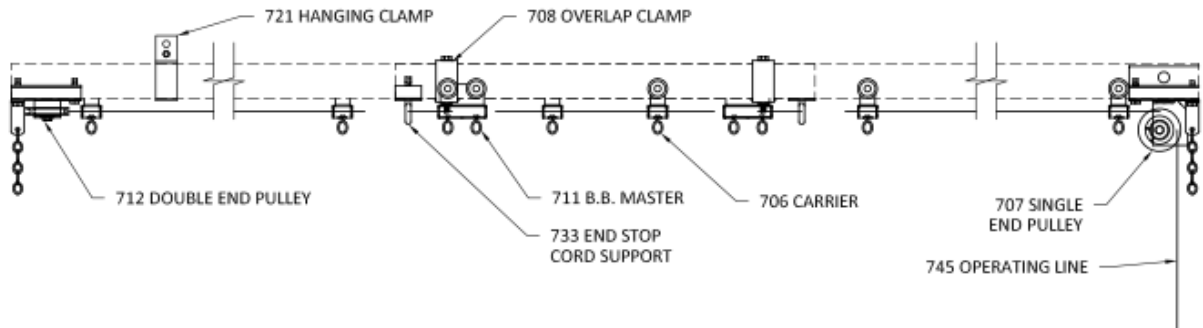





700 SERIES - STANDARD DUTY STRAIGHT TRACK



 <p style="text-align: center;">TRACK</p> <p>16 Gauge galvanized steel, roll-formed to 1-3/4" wide x 2" high.</p> <p>No. 701—16', 18', 20', and 24' lengths. No. 701B — Semi-gloss black powder coat finish. 16', 20', and 24' lengths</p>	 <p style="text-align: center;">CARRIER</p> <p>2 polyethylene wheels riveted to steel plated body with swivel hook.</p> <p>No. 705 — Zinc plated. No. 705B — Black finish.</p>	 <p style="text-align: center;">BALL BEARING CARRIER</p> <p>2 nylon-tired shielded ball bearing wheels riveted to steel body with swivel hook.</p> <p>No. 706 — Zinc plated. No. 706B — Black finish.</p>	 <p style="text-align: center;">SINGLE END PULLEY</p> <p>2-1/2" diameter Nylatron GS sheave with shielded ball bearing. Steel housing clamps to underside of track. Chain bracket for securing offstage edge.</p> <p>No. 707 - Zinc plated. No. 707B — Black finish.</p>
 <p style="text-align: center;">OVERLAP CLAMP</p> <p>Formed steel clamps to align track at overlap.</p> <p>No. 708 - Zinc plated. No. 708B — Black finish.</p>	 <p style="text-align: center;">MASTER CARRIER</p> <p>4 polyethylene wheels riveted to steel body with 2 swivel hooks. 2 clamps for anchoring 1 pair required for overlapping curtains.</p> <p>No. 709 - Zinc plated. No. 709B — Black finish.</p>	 <p style="text-align: center;">OVERLAP MASTER</p> <p>1-3/4" O.D. nylon wheels riveted to steel body with 9" offset arm. Used to overlap curtains on a continuous track. Clamps provided. 1 pair required for overlapping.</p> <p>No. 710 - Zinc plated. No. 710B — Black finish.</p>	 <p style="text-align: center;">BALL BEARING MASTER</p> <p>4 nylon-tired shielded ball bearing wheels riveted to steel body with 2 swivel hooks. Supplied with 2 clamps for anchoring. 1 pair for overlapping.</p> <p>No. 711 - Zinc plated. No. 711B — Black finish.</p>

 <p>BLACK LOCKING MASTER CARRIER</p> <p>Heavy steel construction with nylon wheels and brake to keep master carrier in desired location. Equipped with swivels and trim chains for curtain attachment.</p> <p>No. 611LB – Black finish.</p>	 <p>DOUBLE END PULLEY</p> <p>2-1/2" diameter Nylatron GS sheave with shielded ball bearing. Steel housing clamps to underside of track. Chain bracket for securing of stage curtain edge.</p> <p>No. 712 - Zinc plated. No. 712B – Black finish.</p>	 <p>REAR FOLD GUIDE</p> <p>Allows curtains to fold at offstage edges.</p> <p>No. 713 - Zinc plated. No. 713B – Black finish.</p>	 <p>SIDE MASKING CARRIER</p> <p>No. 709 master carrier with 3-3/4" x 5-3/4" steel plate for attaching side masking frame. Supplied with 2 clamps for anchoring operating line or cable.</p> <p>No. 714 - Zinc plated. No. 714B – Black finish.</p>
 <p>HANGING CLAMP</p> <p>Formed steel brackets clamp to track. Adjusts to any position. 1 pair pictured.</p> <p>No. 721 - Zinc plated. No. 721B – Black finish.</p>	 <p>"S" HOOK</p> <p>1-1/2" steel hook for curtain attachment to carrier</p> <p>No. 723 - Zinc plated.</p>	 <p>TRIM CHAIN</p> <p>Chain added to carriers to provide 6" of curtain height adjustment.</p> <p>No. 724 - Zinc plated.</p>	 <p>"L" BRACKET</p> <p>6"x6" zinc plated bracket for track wall mount applications.</p> <p>No. 727 - Zinc plated.</p>
 <p>SPLICE</p> <p>Formed steel brackets align and lock track sections together. 1 pair pictured.</p> <p>No. 728 - Zinc plated. No. 728B – Black finish.</p>	 <p>CEILING TRACK SPLICE</p> <p>Formed steel brackets align and lock track sections together. 1 pair pictured.</p> <p>No. 729 - Zinc plated. No. 729B – Black finish.</p>	 <p>END STOP</p> <p>Bolt with horizontal pipe spacer to prevent carriers from travelling beyond track desired location. For use with walk along track.</p> <p>No. 732 - Zinc plated. No. 732B – Black finish.</p>	 <p>END STOP AND CORD SUPPORT</p> <p>Steel clamp with eye to support operating line and prevent carriers from travelling beyond desired location. 1 pair for overlapping</p> <p>No. 733 - Zinc plated. No. 733B – Black finish.</p>


 <p>PIVOT DEVICE</p> <p>Heavy steel construction with nylon-tired ball bearing wheels. Supplied with brackets for 1-3/8" OD pipe or tubing (6' max recommended length). Allows masking draperies to rotate to any angle. Working load limit 60lbs.</p> <p>No. 739 - Zinc plated. No. 739B – Black finish.</p>	 <p>INDEXING PIVOT DEVICE</p> <p>Pivot device with special plate to index rotation at 22-1/2 degree increments. Supplied with brackets for 1-3/8" OD pipe or tubing (6' max recommended length). Working load limit 60lbs.</p> <p>No. 741 - Zinc plated. No. 741B – Black finish.</p>	 <p>BRAKE KIT</p> <p>Spring equipped arm with neoprene pad. Add to pivot device to prevent undesired movement along track.</p> <p>No. 742 - Zinc plated. No. 742B – Black finish.</p>	 <p>OPERATING LINE</p> <p>1/4" diameter black polyester braided polyester over solid aramid core for manual operation.</p> <p>No. 745</p>
 <p>OPERATING CABLE</p> <p>3/16" diameter black polyester jacket braided over 3/32" galvanized aircraft cable. For use with motorized track.</p> <p>No. 747</p>	 <p>FLOOR BLOCK</p> <p>4" diameter Nylatron GS sheave with shielded ball bearing in steel housing. 9" vertical adjustment.</p> <p>No. 755B - Black finish.</p>	 <p>DETACHABLE FLOOR BLOCK KIT</p> <p>7 gauge steel plate with hardware for use with No. 108 Adjustable floor block for quick release.</p> <p>No. 756B - Black finish.</p>	 <p>CENTER PIPE SUPPORT</p> <p>Formed steel bracket used to support tracks at overlap.</p> <p>No. 758 - Zinc plated. No. 758B – Black finish.</p>



CENTRE TAKEOFF PULLEY

Steel housing contains 2-1/2" diameter Nylatron GS sheaves with dheidled ball bearings. Used when operating lines must be turned horizontally toward curtain machine or mule block.

No. 770 - Zinc plated.
No. 770B – Black finish.



DRAW CURTAIN MACHINE

See page [26-27](#) for draw curtain machine details

GENERAL SPECIFICATIONS

700 SERIES STANDARD DUTY STRAIGHT CURTAIN TRACK

Provide Model 700 track

Track shall be 16 gauge galvanized steel, roll-formed to 45 mm (1-3/4") wide X 50 mm (2") high with continuous slot in bottom. Provide un-spliced in lengths up to 7900 mm (26').

Suspend track with two-piece clamp hanger formed from 11 gauge steel. Provide 610 mm (2') overlap at center, rigidly separated by two overlap clamps. Install end stop with cord support at each overlapping track end. Where lengths exceed 7900 mm (26'), connect tracks with 305 mm (12") long, two-piece splicing clamp of 12 gauge steel.

Provide single carriers, spaced on 305 mm (12") centers, constructed of two polyethylene wheels fastened parallel to formed steel carrier body with swivel hook for attachment of curtain.

Master carriers shall be 4-wheel assemblies with formed steel bodies and two swivel hooks each. Connect to operating line with two machined steel cord clamps captured within each body.

Single and double end pulleys shall clamp securely to the underside of the track channel and shall contain 64 mm (2-1/2") diameter sheaves enclosed in steel housings to prevent operating line from escaping the grooves. Nylatron GS sheaves shall be molded around shielded and greased ball bearings and grooved to accommodate up to 6 mm (1/4") operating line.

Provide floor block in 12 gauge steel housing containing 100 mm (4") Nylatron GS shielded ball bearing sheave. Sheave axle shall lock at any point within 230 mm (9") vertical slots to allow tension adjustment of operating line.

Black operating line shall be 6 mm (1/4") diameter, stretch-resistant rope with spun polyester outer jacket braided over Dyneema core.

All steel components shall be zinc plated to resist corrosion.

Distributed by: **GiCor lodging projects ltd.**

2410 - 39 Ave. NE, Calgary, AB. T2E 6X1

1-866-664-4267 // info@gicor.com // www.gicor.com

